


## C5 Board Conveyors

### The C5 Internal Board Conveyor

The internal board conveyor allows automatic loading and unloading of boards. The C5 comes standard with both rails manually adjustable, and the C5d comes with both rails automatically adjustable (programmable). The automatically adjustable rails on the C5d maximize throughput by locating the board centrally between the front and rear feeder banks to avoid head to head interference. The manually adjustable rails on the C5 can be located toward the rear of the machine, or toward the front of the machine depending on your needs. The C5 can be ordered with the automatic rail width option with either one rail adjustable (fixed front, or fixed rear rail), or both rails adjustable. Any conveyor option can be configured for left-to-right, or right-to-left travel. The large board option adds a second board stop, which effectively increases the placement area to 787mm x 460mm (31" x 18.1").

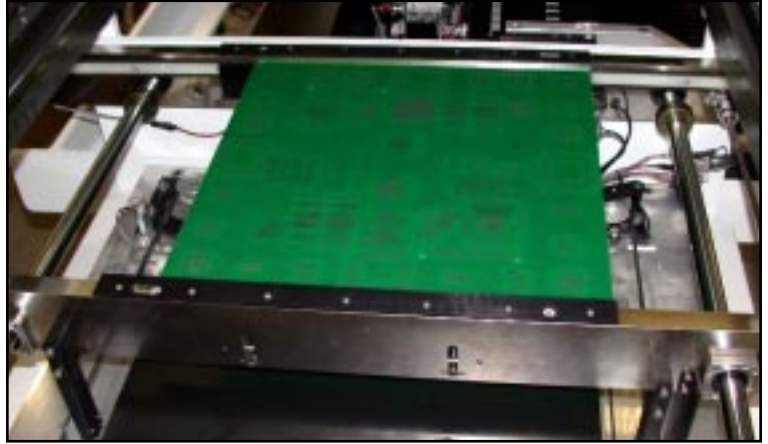

### External Input/Output Conveyors

The external input/output conveyors mount on one, or both sides of the machine, and pass boards into or out of the C5. They allow board buffering, or can be used for direct feeding from a printer, or to an oven or other device. The conveyors are SMEMA compatible, and are available with the automatic rail width option. They can be configured with fixed front or fixed rear rail, and either left-to-right or right-to-left direction of travel.



### C5 CONVEYOR ORDERING GUIDE

#### INTERNAL CONVEYOR OPTIONS

**5LBO - Large board option**

**5IBC-1AW - Automatic rail width option (C5 option only)**

**5IBC-2AW - Dual automatic rail width option (C5 option only, standard on C5d)**

#### EXTERNAL CONVEYOR OPTIONS

**5I/OC - Input/output conveyor, manual adjust rail**

**5I/OC-1AW - Input/output conveyor with automatic rail width option**